

SWF 5.1



1.	3
2.	3
3.	4
4.	4
5.	6
6.	6
7.	8
8.	8

1.

SWF 5.1

.
 ,
 .
 ,
 ,
 12 18 10
 ,
 ,
 :
 ;
 ;
 ();
 ;
 (;
 , ,);
 ;
 .

2.

- :
24VDC ($\pm 10\%$)
- : 11mA
- : 30mA
- « »: () /
120VAC/1
24 VDC/1
- « »: () /
120VAC/1
24 VDC/1
- (, , 1 250)
- -10...+70
- 0...-80%
- 69,5 50,5 21
- 12 18 10
- : 3, 5, 10, 15, 20, 25 ,
- 200
- 5,4
- 3

3.

5,4 ,

12 18 10
*,

3, 5, 10, 15, 20 25

1 250

()

50 ,

* - 200

4.

«POWER» -

«ALARM» -

• ()

10 ,

• :2

•


«TIME DELAY»

220 °
ALARM 1 250 .
1,5 ,
50 / .
10 .

«SENSITIVITY»

220 °
1,5 , 50 / .



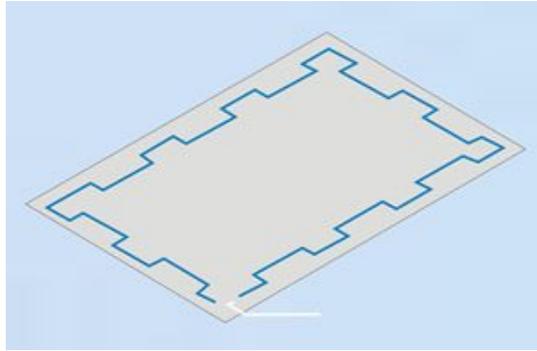

**



" "



http://www.protechki.ru/pdf/Cable_Calculator.xls

** -

50

7.

1,5

50 /

SENSITIVITY TIME DELAY.

!

SENSITIVITY TIME DELAY

8.

12

